




CEP20

puntales

▼ Características técnicas

Roscado: Descubierta
 Diámetro tubo externo (mm): 76
 Diámetro tubo interno (mm): 63,5
 Dimensiones Placas (mm): 120x120x8
 Diámetro gancho (mm): 16

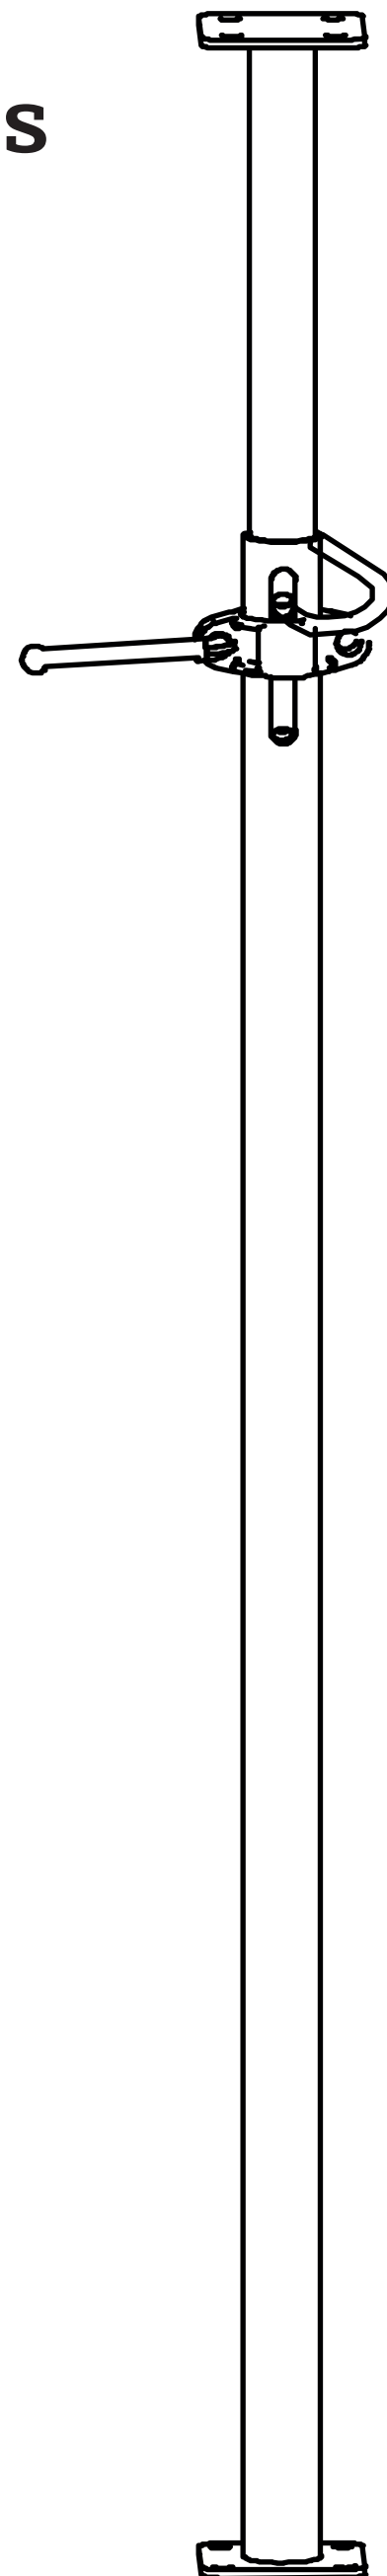

	CEP 20-300	CEP 20-350	CEP 20-400	CEP 20-450	CEP 20-500
Lmin [m]	1,80	2,00	2,30	2,50	2,90
Lmax [m]	3,00	3,50	4,00	4,50	5,00
H [m]	CAPACIDAD				
	[kN]	[kN]	[kN]	[kN]	[kN]
1,80	36,0				
1,90					
2,00		35,0			
2,10					
2,20					
2,30	35,0		35,0		
2,40	32,3		35,0		
2,50	29,7	33,6	35,0	35,0	
2,60	27,4	31,1	35,0	35,0	
2,70	25,5	28,8	32,9	34,0	
2,80	23,7	26,6	30,6	32,1	
2,90	22,1	25,0	28,5	30,0	35,0
3,00	20,0	23,3	26,7	28,1	35,0
3,10		21,9	25,0	26,4	34,3
3,20		20,5	23,4	24,8	33,3
3,30		20,0	22,0	23,4	31,2
3,40			20,8	22,0	29,3
3,50			20,0	20,0	20,8
3,60		26,0			
3,70		24,5			
3,80		23,1			
3,90		21,9			
4,00		20,0	20,8	20,0	
4,10					
4,20					
4,30					
4,40					
4,50					
4,60					
4,70					
4,80					
4,90					
5,00					

CONDOR